


# UL Class 2 Transformer



Part No. 503130F-12

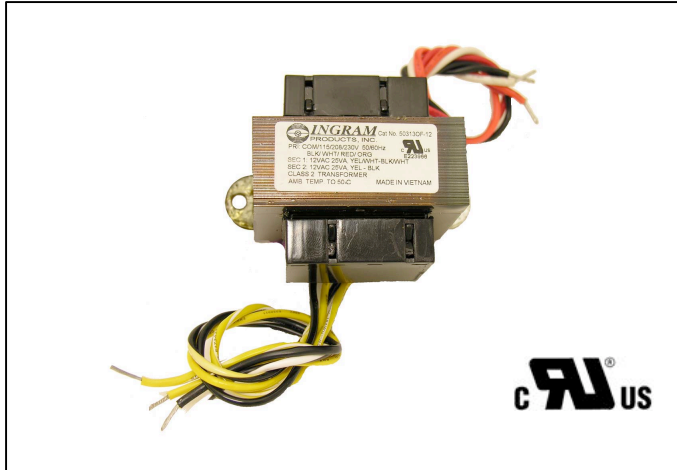

The Ingram UL Class 2 Transformer is a multi-tapped primary, dual winding secondary transformer allowing operation at 3 input and two output voltages. It employs PTC (positive temperature coefficient) auto resettable fuse technology to protect it from overload conditions. The PTC device effectively opens during the overload, then resets after the undesirable condition has been removed. These transformers are indispensable wherever low voltage supplies are needed.

## Features

- Operates at one of three input voltages: 115, 208, or 230VAC
- Two configurable output voltages: 12 and 24VAC
- PTC (Auto resetting fuse) protects transformer from damaging overload currents

## Technical Specifications

- Input voltages: 115/208/230 VAC
- Output voltages: 12 or 24VAC @ 50VA
- Max current output: 2.083A @ 24VAC  
4.167A @ 12VAC
- Max. operating temp: 50°C (ambient)
- Weight: 1.8 lbs.
- Laminated ferrite core

